

NOTES:

1. MINIMUM 0.5% GUTTER GRADE. (GRADES TO BE DETAILED ON PLANS).
2. BOULEVARD WIDTHS TO BE MAINTAINED AROUND BULB.
3. MINIMUM 1.0m SPACING BETWEEN DRIVEWAY CURB DEPRESSIONS.

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED.

TOWN OF BRADFORD WEST GWILLIMBURY



TYPICAL CUL-DE-SAC DETAIL

SCALE: N.T.S.

LAST REVISED: JUNE 2011

STD.DWG.

B108

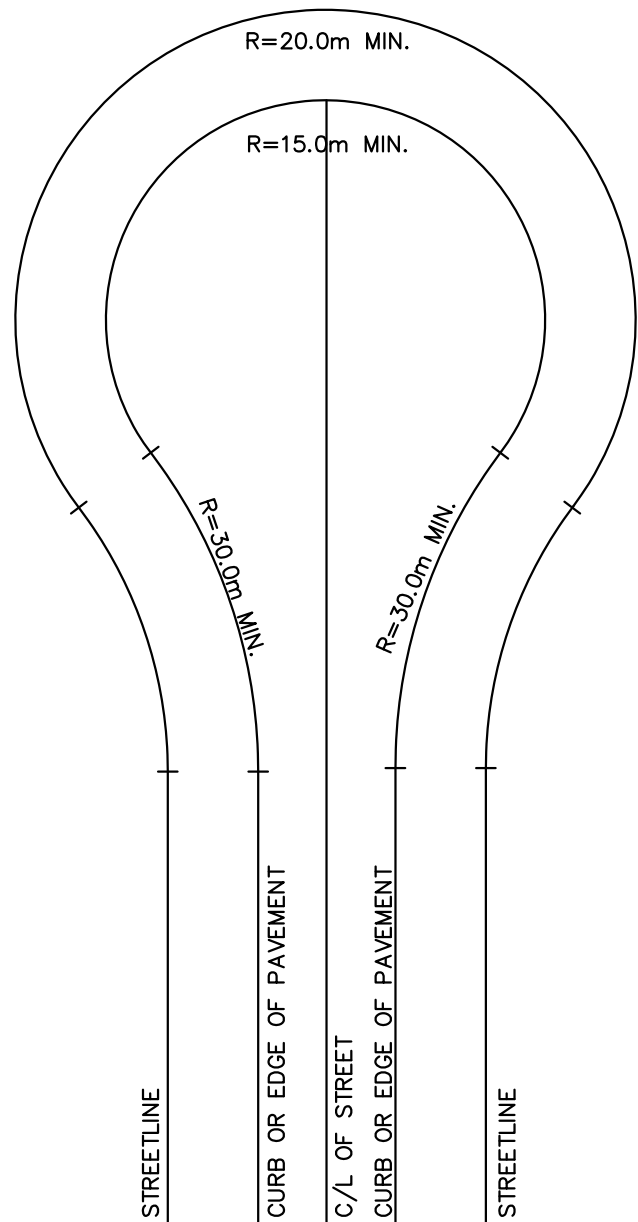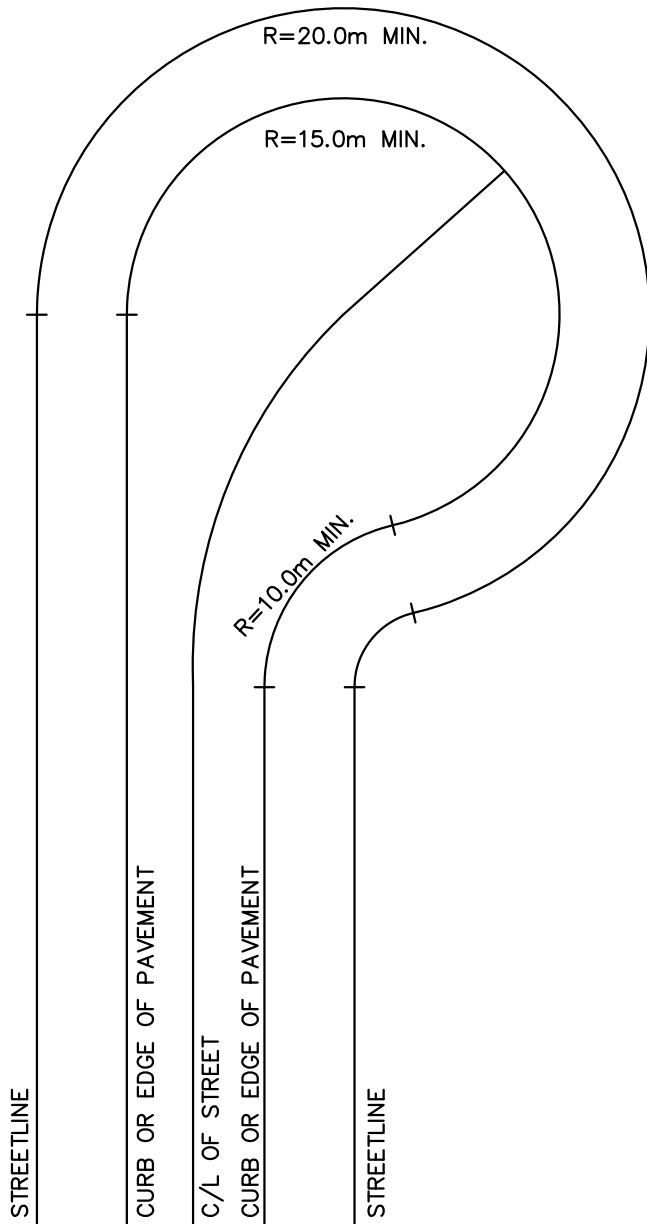

NOTES:

1. MINIMUM 0.5% GUTTER GRADE. (GRADES TO BE DETAILED ON PLANS).
2. BOULEVARD WIDTHS TO BE MAINTAINED AROUND BULB.
3. MINIMUM 1.0m SPACING BETWEEN DRIVEWAY CURB DEPRESSIONS.

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED.

TOWN OF BRADFORD WEST GWILLIMBURY

TYPICAL CUL-DE-SAC DETAIL

SCALE: N.T.S.

LAST REVISED: SEPT 2015

STD.DWG.

B108